

JOHN LOUIS HOME DELUXE ADJUSTABLE DOOR


IMPORTANT!

Do Not Return To Store

For missing parts, damaged parts, technical and assembly questions, please call:

1-800-480-6985

PARTS LIST




(2) Door



(2) Door Handle



(8) 1/2" Wood Screw

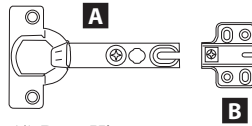

(4) Door Hinge



(2) 1" Screw

READ BEFORE DOOR ASSEMBLY

One adjustable shelf **MUST BE PLACED** at door bottom position. Place bottom shelf and additional adjustable shelves in position prior to door assembly. Shelves will not fit into position if not placed prior to door installation.


Door Glass can be positioned with smooth side facing inside or outside. To re-position glass, loosen glass screws on inside door to remove glass. **Make sure to re-tighten screws before door installation.**

CAUTION!
EDGES ON GLASS ARE SHARP. HANDLE WITH CARE!


STEP 1

1. Insert door hinge PART A into door and secure using (2) 1/2" screw. (FIG. 1).
2. Attach door handle using (1) 1" screw (FIG. 2).
3. Repeat for second door.

(FIG. 1)

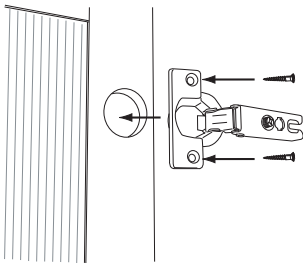

(FIG. 2)

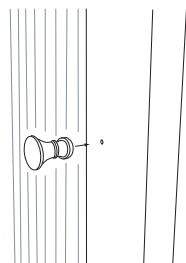


STEP 2

1. Measure down 1 3/4" from bottom of top shelf and mark a line (FIG. 3).
2. Measure down 26" from top line and mark line (FIG. 4).
3. Repeat for second tower side.

(FIG. 3)



(FIG. 4)

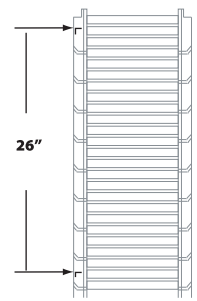


STEP 3

1. Attach door hinge PART B to PART A with adjustment screw positioned all the way inward and secure (FIG. 5)
2. Repeat for each hinge.
3. Hold door in position with top of hinge PART B flush with tower marks (FIG. 6).
4. Mark screw hole locations.


NOTE: Small starter holes are recommended prior to securing door hinges to tower

5. Secure door hinges to inside tower.
6. Repeat for each door hinge location.

(FIG. 5)

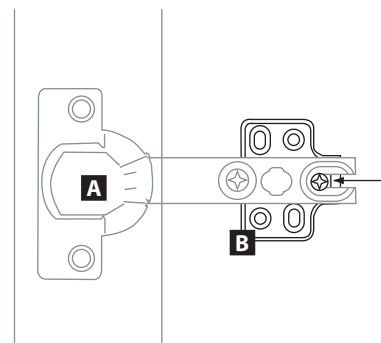

(FIG. 6)


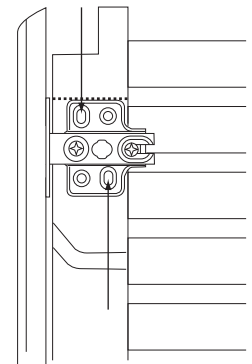


STEP 4

1. To make doors square, adjust door hinges using alignment screws (FIG. 7).

Moves Door Face Left or Right

Moves Hinge Up or Down

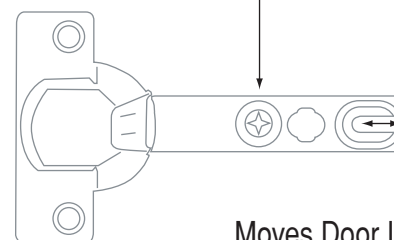

Moves Door In or Out